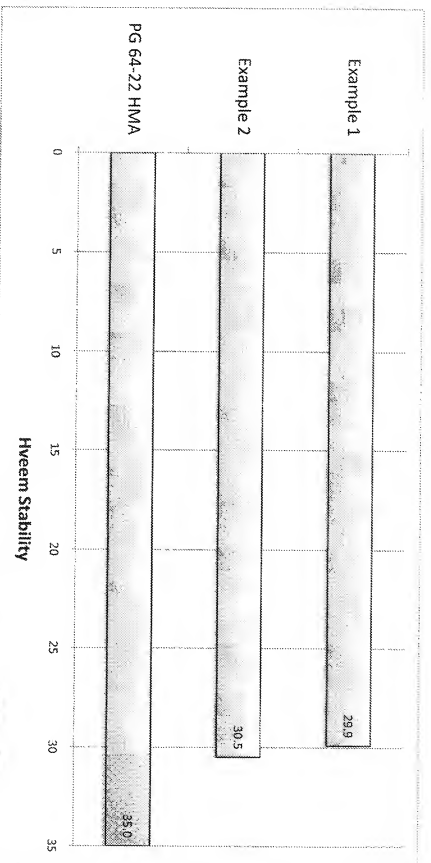
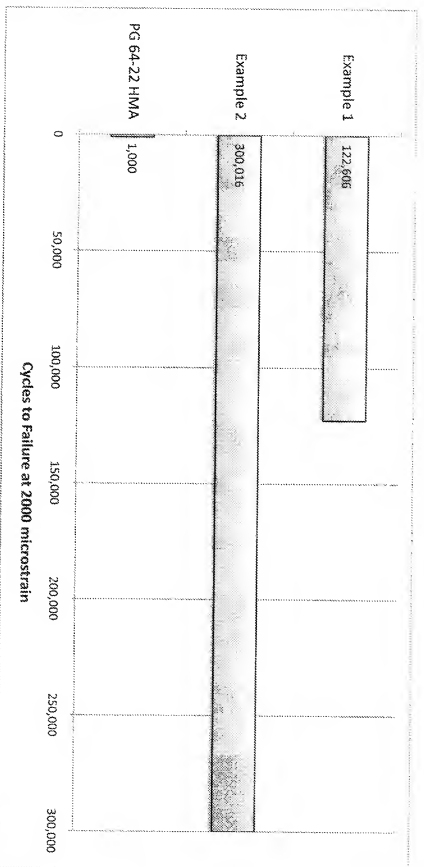


**Fig. 1*****Hveem Stability Results***

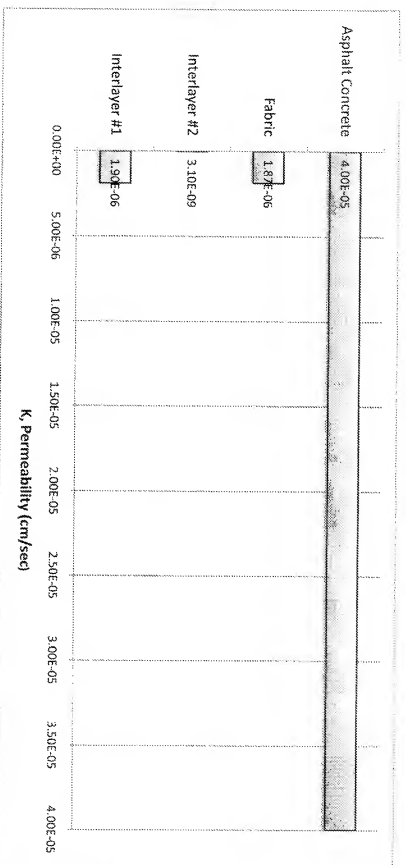
*ASHTO T-246, at 60° C*

Fig. 2

*Fatigue Performance*

*AASHTO TP-8, at test temperature  
Test temperature determined by project climate*

Fig. 3

***K, Permeability (cm/sec)***

***ASTM D 5084, Standard Test Method for  
Measurement of Saturated Porous Materials using a  
Flexible Wall Permeameter (cm/sec)***